


SIGNATURE REQUIRED

DATE

NOTE:

- 1) PROJECT SPACING MAY VARY 1/2"+/- BASED ON PANEL WIDTHS
- 2) PROJECTS ARE ESTIMATED BASED ON MANUFACTURER FULL PANELS WITH PARTIAL PANELS ON END TO COMPLETE RUNS.
- 3) HEIGHTS ARE APPROXIMATE
- 4) GAP SPACING AT BOTOM OF PANEL WILL VARY WITH TERRAIN

COLOR:  
WHITE / TAN / ADOBE  
Posts:  
(1) 4" x 4" x 64"  
(1) 4" X 4" Gothic CAP  
Top \ Btm Rail:  
(2) 2" x 3 1/2" x 72"  
Pickets:  
(1) 7/8" x 3" x 46 1/8"  
(2) 7/8" x 3" x 45 7/8"  
(2) 7/8" x 3" x 45 1/8"  
(2) 7/8" x 3" x 43 3/4"  
(2) 7/8" x 3" x 41 7/8"  
(2) 7/8" x 3" x 39 1/8"  
Picket Caps:  
(11) 7/8" x 3" Dog Ear

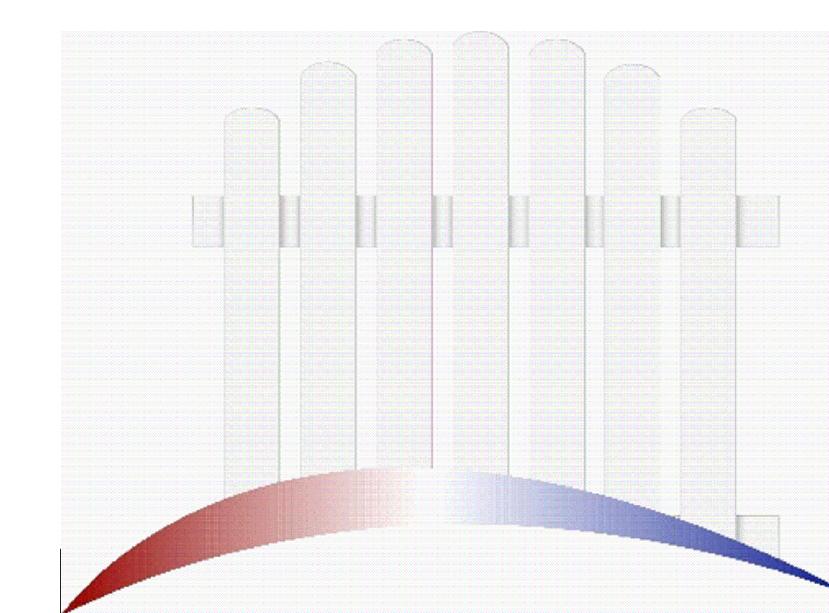

**AMERICAN  
VINYL WORKS**

**4' OVERSCALLOP PICKET FENCE  
3 INCH GAP**

SIZE	FSCM NO.	DWG NO.	REV
		AFC-016	
SCALE	REVISION 10-31-2025		
SHEET			